



Type YMM-T / YMPP-T CAPACITORS

Tapped Metallized Polyester Film / Polypropylene Film Capacitor


Type YMM-T / YMPP-T (Pin Leadwire)

YMM-T / YMPP-T Capacitors are metallized polyester / polypropylene Film but with axial leads and oval shape



Specification

- ▶ Operating Temperature : -25°C to +85°C
- ▶ Rated Voltage : 100, 250, 400, and 630 VDC/ 250VAC
- ▶ Tolerance : ±5%(J), ±10%(K), ±20%(M)
- ▶ Insulation Resistance : More than 9,000M Ω when $c \leq 0,33 \mu\text{F}$
More than 3,000 Ω F when $c > 0,33 \mu\text{F}$
- ▶ Dissipation Factor : less than 0,8% at 1KHz

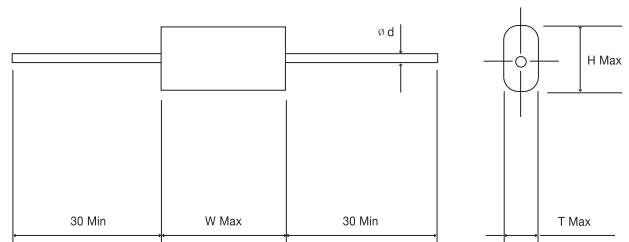

Dimensions

Capacity (μF)	100VDC				250VDC				400VDC				630VDC / 250VAC			
	W	H	T	d(φ)	W	H	T	d(φ)	W	H	T	d(φ)	W	H	T	d(φ)
0,1					16,0	10,5	5,5	0,6	19,0	11,5	7,0	0,6	24,0	13,0	8,0	0,8
0,15					16,0	11,0	6,0	0,6	19,0	12,5	8,0	0,6	24,0	15,0	8,5	0,8
0,22					22,0	10,5	6,5	0,6	24,0	13,5	7,5	0,6	24,0	17,5	9,5	0,8
0,33	16,0	11,0	6,5	0,6	22,0	13,0	6,5	0,6	24,0	14,5	7,5	0,8	32,0	17,0	8,5	0,8
0,47	22,0	11,5	7,0	0,6	22,0	14,5	6,5	0,6	32,0	16,0	8,0	0,8	32,0	19,5	9,5	0,8
0,68	22,0	12,5	7,0	0,6	27,0	12,0	7,0	0,6	32,0	18,0	9,0	0,8	32,0	21,0	10,5	0,8
1,0	22,0	13,0	7,5	0,8	27,0	13,5	7,5	0,8	42,0	21,0	12,5	0,8	42,0	24,0	14,5	0,8
1,5	22,0	14,5	8,5	0,8	27,0	15,5	8,5	0,8	42,0	22,5	13,5	0,8	42,0	26,0	16,5	0,8
2,2	27,0	15,0	9,0	0,8	27,0	20,5	11,0	0,8	42,0	24,5	14,0	0,8	42,0	29,0	19,0	0,8
3,3	27,0	17,0	10,0	0,8	32,0	21,5	10,5	0,8	52,0	26,5	15,0	0,8	52,0	32,0	21,5	0,8
4,7	32,0	22,0	12,0	0,8	32,0	24,0	13,0	0,8	52,0	30,0	18,5	0,8	52,0	35,0	26,0	0,8
6,8	32,0	22,0	12,5	0,8	32,0	28,0	17,0	0,8								
10,0	32,0	24,5	13,5	0,8	42,0	31,0	18,0	0,8								

We can satisfy your special sizes.