



## Type YMM-T / YMPP-T CAPACITORS

Tapped Metallized Polyester Film / Polypropylene Film Capacitor


### Type YMM-T / YMPP-T (Pin Leadwire)

YMM-T / YMPP-T Capacitors are metallized polyester / polypropylene Film but with axial leads and oval shape



### Specification

- ▶ Operating Temperature : -25°C to +85°C
- ▶ Rated Voltage : 100, 250, 400, and 630 VDC/ 250VAC
- ▶ Tolerance : ±5%(J), ±10%(K), ±20%(M)
- ▶ Insulation Resistance : More than 9,000M Ω when  $c \leq 0,33 \mu\text{F}$   
More than 3,000 Ω F when  $c > 0,33 \mu\text{F}$
- ▶ Dissipation Factor : less than 0,8% at 1KHz

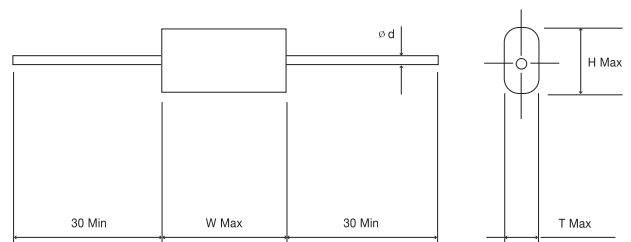

### Dimensions

0,1					16,0	10,5	5,5	0,6	19,0	11,5	7,0	0,6	24,0	13,0	8,0	0,8
0,15					16,0	11,0	6,0	0,6	19,0	12,5	8,0	0,6	24,0	15,0	8,5	0,8
0,22					22,0	10,5	6,5	0,6	24,0	13,5	7,5	0,6	24,0	17,5	9,5	0,8
0,33	16,0	11,0	6,5	0,6	22,0	13,0	6,5	0,6	24,0	14,5	7,5	0,8	32,0	17,0	8,5	0,8
0,47	22,0	11,5	7,0	0,6	22,0	14,5	6,5	0,6	32,0	16,0	8,0	0,8	32,0	19,5	9,5	0,8
0,68	22,0	12,5	7,0	0,6	27,0	12,0	7,0	0,6	32,0	18,0	9,0	0,8	32,0	21,0	10,5	0,8
1,0	22,0	13,0	7,5	0,8	27,0	13,5	7,5	0,8	42,0	21,0	12,5	0,8	42,0	24,0	14,5	0,8
1,5	22,0	14,5	8,5	0,8	27,0	15,5	8,5	0,8	42,0	22,5	13,5	0,8	42,0	26,0	16,5	0,8
2,2	27,0	15,0	9,0	0,8	27,0	20,5	11,0	0,8	42,0	24,5	14,0	0,8	42,0	29,0	19,0	0,8
3,3	27,0	17,0	10,0	0,8	32,0	21,5	10,5	0,8	52,0	26,5	15,0	0,8	52,0	32,0	21,5	0,8
4,7	32,0	22,0	12,0	0,8	32,0	24,0	13,0	0,8	52,0	30,0	18,5	0,8	52,0	35,0	26,0	0,8
6,8	32,0	22,0	12,5	0,8	32,0	28,0	17,0	0,8								
10,0	32,0	24,5	13,5	0,8	42,0	31,0	18,0	0,8								

We can satisfy your special sizes.